


PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B29C 47/00, B32B 1/00, 3/00, 33/00, C08J 9/22, 9/32	A1	(11) International Publication Number: WO 00/13876 (43) International Publication Date: 16 March 2000 (16.03.00)
(21) International Application Number: PCT/US98/17994 (22) International Filing Date: 3 September 1998 (03.09.98) (30) Priority Data: 09/145,657 2 September 1998 (02.09.98) US (71) Applicant: HENKEL CORPORATION [US/US]; Suite 200, 2500 Renaissance Boulevard, Gulph Mills, PA 19406 (US). (74) Agent: WISDOM, Norvell, E., Jr.; Suite 200, 2500 Renaissance Boulevard, Gulph Mills, PA 19406 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published With international search report.

(54) Title: REINFORCEMENT OF HOLLOW SECTIONS USING EXTRUSIONS AND A POLYMER BINDING LAYER**(57) Abstract**

A hollow structural member is reinforced by a housing (10) in the form of a framework exposed structural foam on the housing (10). The housing (10) is placed in the structural member at an orientation with its longitudinal axis perpendicular to the longitudinal axis of the structural member so that the foam is disposed directly against opposed walls of the structural member. Upon curing the foam becomes intimately bonded to the opposed walls of the structural member and to the housing (10) for reinforcing the structural member. Preferably the housing (10) is formed by extrusion so that it can be cut to size across its extrusion axis.

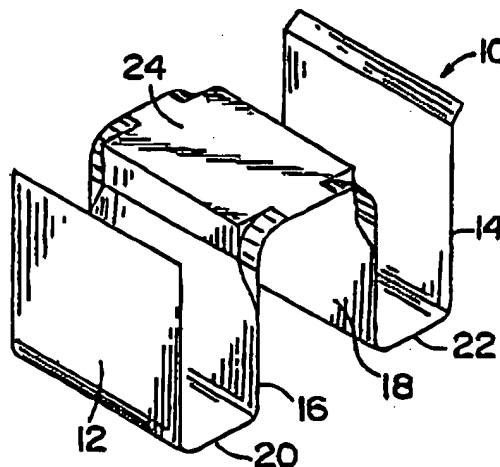

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	CN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MT	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

WO 00/13876

PCT/US98/17994

REINFORCEMENT OF HOLLOW SECTIONS USING
EXTRUSIONS AND A POLYMER BINDING LAYER

BACKGROUND OF THE INVENTION

5 The present invention relates to methods and apparatus
for reinforcing structural members, such as structural
sections used as automotive components.

10 In a number of applications, particularly in the
automotive industry there is a need for light-weight, high-
strength structural members. Although structural members
having these characteristics can be readily obtained through
the use of various metal alloys, such as titanium alloys and
the like, light-weight, high-strength alloys are generally
15 cost prohibitive in automotive applications where weight
reductions are closely balanced against the cost of materials.
Moreover, reinforcement techniques are required which can be
readily adapted to existing geometries of structural parts
thereby eliminating the need for fundamental design changes
and providing a means by which substandard design performance
20 can be remedied. That is, in many instances, design
deficiencies are discovered after the vehicle design has
reached a stage at which radical changes are no longer
feasible.

25 In addition, a significant amount of emphasis has been
placed on performance characteristics of channel-shaped
structural components which encounter forces that produce
bending. Such structural components may be curved, hollow
structural sections, such as automotive compartment rails or
may be channel-shaped sections where two opposing section
30 walls need to be secured together. My U.S. Patent No.
5,575,926 discloses a composite laminate beam having an outer
structural portion which is channel shaped and wherein an

WO 00/13876

PCT/US98/17994

inner tube is disposed within the channel. A structural foam layer is bonded to the inner tube and the outer structural portion.

It would be desirable if techniques could be provided for providing sufficient reinforcement, particularly to curved hollow structural sections or to tie together two opposing sections.

SUMMARY OF THE INVENTION

10 An object of this invention is to provide a reinforced structure which meets the above needs.

A further object of this invention is to provide a method of reinforcing a channel-shaped structural member.

15 In accordance with this invention a reinforced structure comprises a channel shaped structural member and a reinforcement housing within the channel of the member. In one embodiment, the housing has a pair of opposite side walls with end walls being open. The axis of the housing which lies between the side walls and extends through the open ends is perpendicular to the longitudinal axis of the channel. A structural foam is in the housing and is bonded to the side walls of the structural member and to the housing to provide support for the structural member at the location of the housing.

25 In one practice of the invention the structural member is a curved hollow section, such as an automotive compartment rail.

The housing is preferably made as an extrusion which has support walls which are wide and flat. The structural foam is preferably an expandable polymer layer that is bonded to

30

WO 00/13876

PCT/US98/17994

the housing support walls and upon expansion becomes bonded to the side walls of the structural member to tie the extrusion and structural member together. By having the housing as a drop-in part, it is possible to customize the shape of the housing for being placed at any desired location in the structural member.

In an alternative embodiment of the invention a hollow frame is provided to serve as a mounting structure for the foam layer. The frame is free of barriers or side walls along the sides of the foam that are disposed toward the side walls of the structural member so that the structural foam could be bonded directly to the side walls of the structural member.

THE DRAWINGS

Figure 1 is a perspective view of a reinforcement housing in accordance with one embodiment of this invention;

Figure 2 is an end elevational view of the housing shown in Figure 1;

Figure 3 is a side elevational view of the housing shown in Figures 1-2;

Figure 4 is a top plan view of the housing shown in Figures 1-3;

Figure 5 is an end elevational view showing the housing of Figures 1-4 mounted in a structural member;

Figure 6 is a cross-sectional view taken through Figure 5 along the line 6-6;

Figure 7 is a perspective view showing a curved structural member incorporating the housing of Figures 1-4;

Figure 8 is a cross-sectional view in elevation showing a modified form of housing mounted in a structural member in

WO 00/13876

PCT/US98/17994

accordance with this invention;

Figure 9 is a view similar to Figure 7 showing yet another form of housing in accordance with this invention;

Figure 10 is an end elevational view of the reinforced structure shown in Figure 9;

Figure 11 is a view similar to Figure 9 showing still yet another form of housing in accordance with this invention; and

Figure 12 is an end elevational view of the reinforced structure shown in Figure 11.

DETAILED DESCRIPTION

Various structural members require reinforcement in order to properly function. A particular form of structural member would be one having hollow sections such as automotive compartment rails. It is particularly difficult to reinforce such rails in their curved sections. It would also be desirable to provide reinforcement for structural members having spaced walls by tying the two opposing section walls together even where the members are not curved.

In accordance with a preferred practice of this invention a housing is provided which may be an extrusion having the extrusion direction perpendicular or 90° to the main longitudinal axis of the rail or structural member being reinforced. This can be accomplished by having the reinforcement housing open at each end with the open ends disposed at the opposed side walls of the structural member. In this manner, the sub-elements or walls of the housing or extrusion become walls for a bulkhead of support for the structural member by having a polymer layer or structural foam bonded to the housing which also become bonded to the opposed walls of

WO 00/13876

PCT/US98/17994

the structural member. Thus, the polymer layer is applied to the sides of the housing or extrusion which are wide and flat. The polymer layer upon curing ties the extrusion or housing to the main section or structural member through
5 adhesion and entrapment.

The housing is preferably an aluminum or plastic extrusion which is simple to make and cut to become custom fit thereby eliminating hydra-forming or tube bending. The housing can be cut to a size to snugly fit in the structural
10 member channel. This structure also optimizes use of the polymer layer. Reference is made to my U.S. Patent No. 5,575,526 for examples of suitable reinforcement foam for polymer layer materials. It is to be understood that other structural foam may be used in accordance with this invention.

15 In general, the invention would be practiced by having the extrusion or housing in a form which could be simply dropped into the structural member particularly where the structural member is of open channel shape having a bottom wall and opposed side walls. The invention could be practiced
20 by also inserting or dropping the housing into an open end wall of a tubular structural member and the polymer would bond to opposite wall portions of the tubular member. The invention may also be practiced where the hollow structural member is in the form of two spaced walls of separate members
25 wherein it is desired to provide a reinforcement in the spacing between the walls.

Prior to insertion of the housing, the polymer layer of structural foam would be bonded to support or mounting surfaces of the housing so that upon curing the structural
30 foam then becomes bonded to the walls of the structural

WO 00/13876

PCT/US98/17994

member. This results in an integral structure comprising the structural member and the housing and the structural foam with the opposed walls of the structural member being tied together by the intermediate structural foam.

5 Figures 1-4 illustrate a housing 10 in accordance with one embodiment of this invention. As shown therein housing 10 is an extrusion of generally W-shape having a pair of outer walls 12,14 spaced from a pair of inner walls 16,18 which are joined to the respective outer walls by bottom walls 20,22.
10 The inner walls are joined together by top wall 24.

 Structural foam 26 is provided in the two channels formed between the sets of walls 12,16 and 14,18. The opposite ends of housing 10 are open so that the foam 26 is exposed at these opposite open ends. In practice, as shown in Figures 5-6, the
15 housing 10 with its polymer foam layers 26,26 is simply dropped into a hollow structural member in a direction perpendicular to the longitudinal axis of the structural member so that the open ends of the housing with its exposed foam are disposed against the side walls of the structural
20 member. Figures 5-6, for example, show the structural member to be an automotive rail having a pair of opposed walls 28,30 joined together by a bottom wall 32 forming an open channel. Each wall 28,30 has an outwardly extending flange 34,36. A pin 38 extends through the opposed side walls 28,30. Housing
25 10 would be dropped in to the channel until the housing rests on pin 38. Alternatively, if housing 10 is long enough, it could be spaced from and straddle pin 38.

 Although not illustrated, the outwardly extending flanges at the free ends of each wall 12,14 of housing 10 may include
30 a pair of slits about one-third of the way inwardly of each

WO 00/13876

PCT/US98/17994

edge to create a separate tongue at the center of each free end. The tongue could be bent inwardly directly above the channels holding foam 26. Upon the foam 26 expanding, the inwardly directed tongues would serve as anchor or bonding members for the foam.

Housing 10 may be cut to snugly fit within the spacing between walls 28,30 of structural member 27. The generally W-shape of housing 10 permits the housing to fit over pin 38 which would be disposed between side walls 16,18.

Foam 26 is an expandable foam. Thus, in its uncured and unexpanded state shown in Figure 3 the foam occupies only a portion of the two channels formed between walls 12,16 and 14,18. Upon curing, the foam 26 expands and because of the open walls of housing 10 the foam 26 expands into contact with walls 28,30 of structural member 27 and becomes intimately bonded to the walls thus tying walls 28 and 30 together.

Figure 7 shows the use of housing 10 in a tow board compartment rail located at the curved section of the rail 27.

Preferably, sufficient amount of foam 26 is used to completely fill housing 10. What is essential, however, is that there be sufficient foam to intimately bond to walls 28,30.

It is to be understood that while Figures 1-7 illustrate the housing 10 to be of generally W-shape other forms of housing such as an inverted U-shape could be used in accordance with the intended portion of the hollow structural member. A W-shape is particularly advantageous for accommodating pin 38.

Figure 8 shows an alternative practice of the invention wherein a housing 40 may be extruded to provide an open

WO 00/13876

PCT/US98/17994

structure. Housing 40 may, for example, be an aluminum extrusion which includes a pair of side walls 42,44 joined by bridge member 46 below the ends of the side walls with the bottom of the side walls joined by wall 48. Wall 48 extends outwardly beyond the side walls 42,44 to form a support extension 50,52 which then extends downwardly to form extensions 54,56 which fit snugly against walls 28,30 of rail or support member 27. Layers of foam 58 are bonded to walls 42,44 and the extensions or shoulders 50,52. Thus, the foam is disposed directly against walls 28,30 of support member 27 since housing 40 does not include any walls or barriers which would prevent direct contact of the foam layers 58,58 with the opposed walls 28,30. When foam 58,58 is cured the foam becomes intimately bonded to walls 28,30 as well as to reinforcement housing 40 thereby effectively reinforcing the structural member. As illustrated in Figure 8 pin 38 extends through open areas of housing 40.

Figures 9-10 illustrate a further embodiment of this invention wherein the housing 60 is made of open framework which consists of a plurality of spaced walls 62,64,66,68,70 extending in generally the same direction and which would extend completely across the open channel of structural member 27 between opposing walls 28,30. Although five spaced walls are shown, a greater or lesser number could be used. Preferably there are at least three walls.

Each set of outer ends of walls 62,64,66,68,70 is interconnected by spaced transverse caps or support walls 72,74. Walls 72,74 may be secured to the frame formed by walls 62,64,66,68,70 in any suitable manner such as by welding for a permanent connection, or may be detachably secured by

WO 00/13876

PCT/US98/17994

the later described flanges. The walls 72,74 may include outward extensions or flanges 76,78 which would be bent partially around the framework formed by walls 62,64,66,68,70 for either a permanent or detachable securement.

5 Although not illustrated in Figure 9 housing 60 is capable of accommodating a pin such as pin 38 which would extend, for example, between spaced walls 64 and 66. In order to accommodate the pin the housing might be inserted in two parts by first inserting the outer wall 74 below the pin and
10 then dropping the remainder of housing 60 over the outer wall 74 so that the housing then assumes its completed structure shown in Figure 9.

 Alternatively and preferably, as shown in Figures 11-12, housing 60A may be extruded so that the support walls 72A,74A
15 terminate at the edges of the walls 62,64,66,68,70. The extrusion axis is in the direction of walls 62,64,66,68,70. Thus, the housing 60A could be cut to its desired size by cutting across the extrusion axis. Layers of foam 80 would be provided on each outer support wall 72A,74A to become
20 intimately bonded to opposed walls 28,30.

 As illustrated each housing has a bisecting axis which would be disposed in the same plane as the longitudinal axis of the channel between walls 28,30. Preferably, the housing is of identical structure on each side of its bisecting axis.
25 Housing 10 also has a longitudinal axis along its extrusion axis which is perpendicular to its bisecting axis and perpendicular to the longitudinal axis of the structural member between walls 28,30. The housing may also be of identical structure on each side of its longitudinal axis.
30 Foam is bonded to the housing each side of the bisecting axis

WO 00/13876

PCT/US98/17994

for bonding to walls 28,30.

The invention may thus be practiced by, for example, reinforcing heavy steel reinforcement welded together. For example, because of a curved geometry it is difficult to reinforce the structural member properly due to the tendency of durability cracking. This occurs, for example, with truck cabs mounted on a frame by a heavy bracket wherein heavy bolts have been used to connect the walls together but the metal structural member cannot be properly reinforced. By use of the invention, an effective reinforcement results with a lightweight structure. Essentially all that is necessary is to drop in the housing or box having the exposed structural foam located toward the walls of the structural member so as to tie the walls together thereby avoiding localized stresses. The invention could be used, for example, with massive steering gear boxes which uses solid steel bushings dropped into the rail assembly. By forming the housing as an extrusion it is possible to readily manufacture the housing and to cut it to shape for a customized fitting in the structural member. Upon expansion the foam becomes bonded to the walls of the structural member thereby avoiding the need for heavy reinforcement.

In the preferred practice of this invention the structural member is a vehicle component made of metal. The invention, however, may be practiced for reinforcing other types of structural members in other types of environments. Thus, the structural member could be made of plastic or any material which could be intimately bonded to the structural foam.

The housing is preferably extruded from any suitable

WO 00/13876

PCT/US98/17994

material, such as aluminum or glass filled nylon.

The invention may be practiced where the foam is not expandable or fully expandable by, for example, pumping the foam in place after the housing has been inserted into the structural member. Suitable structural foam material is disclosed in copending application Serial No. 09/103,031, filed June 23, 1998, the details of which are incorporated herein by reference thereto. As disclosed therein, the foam is preferably a resin-based material which incorporates hollow glass microspheres to reduce density. With specific reference now to the composition of foam layer, the density of the material should preferably be from about 20 pounds per cubic feet to about 40 pounds per cubic feet to minimize weight. The melting point, heat distortion temperature and the temperature at which chemical breakdown occurs must also be sufficiently high such that the foam layer maintains its structure at high temperatures typically encountered in paint ovens and the like. Therefore, the foam should be able to withstand temperatures in excess of 200 degrees C. and preferably 175 degrees C. for short times.

In one particularly preferred embodiment the foam layer includes a synthetic resin, glass microspheres, a blowing agent and a filler. The foam is preferably expanded in place between walls 28 and 30 and is prepared by blending together the following materials. A synthetic resin comprises from about 50 percent to about 80 percent by weight and more preferably from about 60 percent to about 75 percent by weight of the mixture used to form the foam. Glass microspheres comprises from about 10 to about 40 percent by weight and more preferably from about 15 to about 25 percent by weight of the

WO 00/13876

PCT/US98/17994

mixture. A blowing agent comprises from about 1 to about 10 percent by weight and more preferably from about 2 to about 6 percent by weight of the mixture.

5 The foam is preferably initially applied in unexpanded form to the housing and then expanded into intimate contact with the walls 28,30 and thereby bonded to both the housing and the structural member. Where the foam is heat expandable and the structural member is a vehicle part, use could be made of the paint oven to initiate expansion of the foam, without
10 requiring a separate heating step.

Various fillers (such as fumed silica, calcium carbonate, milled glass fiber, and chopped glass strand) may be included. A filler comprises from about 1 percent to about 10 percent by weight and preferably from about 3 percent to about 8
15 percent by weight of the mixture used to form the foam.

Preferred synthetic resins for use in the present invention include thermosets such as epoxy resins, vinyl ester resins, thermoset polyester resins, and urethane resins. It is not intended that the scope of the present invention be
20 limited by molecular weight of the resin and suitable weights will be understood by those skilled in the art based on the present disclosure. Where the resin is a thermoset resin, various accelerators, such as imidizoles and ADMP 30", and curing agents, preferably di-cyanamide, may also be included
25 to enhance the cure rate. A functional amount of accelerator is typically from about 1 percent to about 3 percent of the resin weight with a corresponding reduction in resin, microspheres or filler. Similarly, the amount of curing agent used is typically from about 2 percent to about 8 percent of
30 the resin weight with a corresponding reduction in resin,

WO 00/13876

PCT/US98/17994

microspheres or filler. Effective amounts of processing aids, stabilizers, colorants, UV absorbers and the like may also be included in layer. Thermoplastics may also be suitable in some applications.

- 5 In the following tables, preferred formulations for use in forming the foam are described. All percentages in the present disclosure are percent by weight unless otherwise specifically designated.

WO 00/13876

PCT/US98/17994

INGREDIENTPERCENTAGE BY WEIGHTFORMULA I

One Part	Bisphenol A Epoxy	70%
	Nipol Liquid Rubber	8%
5	Di-cy Curative	7%
	EMI-24 Accelerator	1%
	B38 Microspheres	14%

FORMULA II

10	Two Part	<u>Resin Side "A"</u>		<u>Curative Side "B"</u>
		Epoxy Resin	74%	Aliphatic Amine 65%
		Celogen Blowing Agent	6%	Thixotrope 8%
		Thixotrope	4%	K20 Microspheres 27%
		K20 Microspheres	16%	

15

It is to be understood that other structural foams may be used with the invention which would bond to both the structural member and the drop-in housing. The drop-in housing is preferably of open frame construction with a bisecting axis wherein there is identical housing structure on each side of the bisecting axis. Unless otherwise stated, the term Abisecting axis@ does not require the housing to be of identical structure on each side of the bisecting axis. When the housing is dropped into the structural member, the bisecting axis is along the longitudinal axis of the structural member. The housing has a longitudinal axis perpendicular to its bisecting axis. Where the housing is extruded, its longitudinal axis is preferably the extrusion axis. The housing may also be symmetrical on each side of its longitudinal axis. Foam would be secured to the housing one each

WO 00/13876

PCT/US98/17994

side of the bisecting axis exposed for direct contact with the spaced walls of the structural member to bond to the spaced walls.

WO 00/13876

PCT/US98/17994

IN THE CLAIMS:

1. A reinforced structure comprising a structural member having a pair of spaced longitudinal side walls with a longitudinal axis between said side walls, a drop-in
5 reinforcement housing having a bisecting axis, said drop-in housing having a longitudinal axis perpendicular to said bisecting axis, said drop-in housing being mounted in said structural member at an orientation wherein said longitudinal axis of said housing is
10 perpendicular to said longitudinal axis of said structural member, structural foam on mounting surface structure in said housing on each side of said bisecting axis exposed to and in contact with said side walls of said structural member, and said structural foam being
15 bonded to said housing and to said side walls of said structural member to reinforce said structural member at the location of said housing.
2. The structure of claim 1 wherein said structural member is channel-shaped with said side walls forming the walls
20 of said channel and with said structural member having an open wall between said side walls.
3. The structure of claim 2 wherein said foam is an expandable foam.
4. The structure of claim 2 wherein said housing is of
25 identical structure on each side of said bisecting axis.
5. The structure of claim 4 wherein said foam comprises a pair of spaced layers.
6. The structure of claim 5 wherein said foam layers extend
30 completely across the spacing between said side walls of said structural member.

WO 00/13876

PCT/US98/17994

7. The structure of claim 6 wherein said housing is extruded along its longitudinal axis.
8. The structure of claim 7 wherein said housing includes two spaced outer side walls each of which has opposite ends, and said housing being open at said opposite ends of said side walls.
9. The structure of claim 8 wherein said housing further includes two spaced inner walls, each of said inner walls forming a foam receiving channel with respect to its adjacent outer wall, and a foam layer being in each of said foam receiving channels.
10. The structure of claim 9 wherein said housing is W-shaped, and a pin extending through said side walls of said structural member at a location between said inner walls of said housing.
11. The structure of claim 10 wherein said structural member is an automotive compartment rail having a curved portion, and said housing being located at said curved portion.
12. The structure of claim 4 wherein said housing comprises an open framework formed by at least three spaced walls disposed in generally the same direction with respect to each other, a first cross wall spanning and mounted to said spaced walls, said first cross wall comprising said mounting surface structure, and said foam being on said first cross wall.
13. The structure of claim 12 including a second cross wall spanning and mounted to said spaced walls remote from said first cross wall, and said foam also being on said second cross wall.

WO 00/13876

PCT/US98/17994

14. The structure of claim 13 wherein said structural member is an automotive compartment rail having a curved portion, and said housing being located at said curved portion.
- 5 15. The structure of claim 5 wherein said housing is of open frame structure including a pair of spaced side walls each of which has an outwardly extending shoulder, and said foam being positioned on said respective set of side wall and shoulder.
- 10 16. The structure of claim 2 wherein said foam is pumped into place.
17. The structure of claim 1 wherein said structural member is an automotive compartment rail in the form of a channel having an open top.
- 15 18. The structure of claim 17 wherein said rail has a curved portion, and said housing being located at said curved portion.
19. The structure of claim 1 wherein said housing is of open frame structure made of extruded material.
- 20 20. The structure of claim 1 wherein said housing includes two spaced outer side walls each of which has opposite ends, and said housing being open at said opposite ends of said side walls.
- 25 21. The structure of claim 20 wherein said housing further includes two spaced inner walls each of said inner walls forming a foam receiving channel with respect to its adjacent outer wall and a foam layer being in each of said channels.
- 30 22. The structure of claim 21 wherein said housing is symmetrically shaped on each side of its bisecting axis

WO 00/13876

PCT/US98/17994

and longitudinal axis.

23. The structure of claim 22 wherein said housing is W-shaped, and a pin extending through said side walls of said structural member at a location between said inner walls of said housing.
24. The structure of claim 23 wherein said structural member is an automotive compartment rail in the form of a channel having an open top, said rail having a curved portion, and said housing being located at said curved portion.
25. The structure of claim 1 wherein said housing comprises an open framework formed by at least three spaced walls disposed in generally the same direction with respect to each other, a first cross wall spanning and mounted to said spaced walls, said first cross wall comprising said mounting surface structure, and said foam being on said first cross wall.
26. The structure of claim 25 including a second cross wall spanning and mounted to said spaced walls remote from said first cross wall, and foam being on said second cross wall.
27. The structure of claim 26 wherein said at least three walls includes five walls, and said housing being of identical structure on each side of said bisecting axis.
28. The structure of claim 26 wherein said structural member is an automotive compartment rail in the form of a channel having an open top, said rail having a curved portion, and said housing being located at said curved portion.
29. A reinforcement housing for reinforcing a structural

WO 00/13876

PCT/US98/17994

- member comprising two spaced outer side walls each of which has opposite ends, and said housing being open at said opposite ends of said side walls, said housing further includes two spaced inner walls, each of said inner walls forming a foam receiving channel with respect to its adjacent outer wall, a foam layer being in each of said channels, and said housing being generally W-shaped.
- 5
30. The housing of claim 29 wherein said housing is made of extruded material.
- 10
31. A reinforcement housing comprising an open framework formed by at least three spaced walls disposed in generally the same direction with respect to each other, a first cross wall spanning and mounted to said spaced walls, said first cross wall comprising a first mounting surface, structural foam being on and bonded to said first cross wall, a second cross wall spanning and mounted to said spaced walls remote from said first cross wall to comprise a second mounting surface, and structural foam being on and bonded to said second cross wall.
- 15
- 20
32. The housing of claim 31 wherein said housing is made from extruded material.
- 25
33. A method of reinforcing a hollow structural member having opposite side wall portions comprising providing a reinforcement housing of open frame structure having a bisecting axis and a longitudinal axis perpendicular to the bisecting axis, securing a structural foam to the housing on each side of the bisecting axis, placing the housing as a drop-in unit into the structural member in
- 30

WO 00/13876

PCT/US98/17994

a direction wherein the longitudinal axis of the housing is perpendicular to the longitudinal axis of the structural member located between the side wall portions and with the structural foam in contact with the side wall portions of the structural member, and curing the structural foam so that the structural foam is bonded to the housing and to the side wall portions.

5

10

34. The method of claim 33 wherein said housing is formed by being extruded along an extrusion axis perpendicular to the bisecting axis.

15

20

25

35. The method of claim 34 including cutting the housing to size across its extrusion axis.

WO 00/13876

1/5

PCT/US98/17994

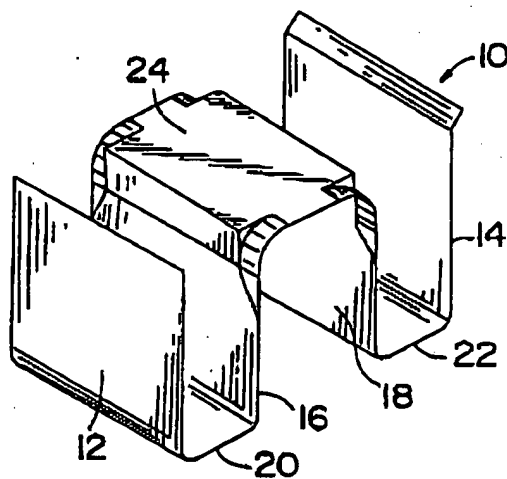


FIG. 1




FIG. 2

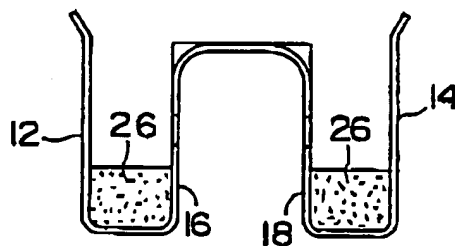


FIG. 3

SUBSTITUTE SHEET (RULE 26)

WO 00/13876

2/5

PCT/US98/17994

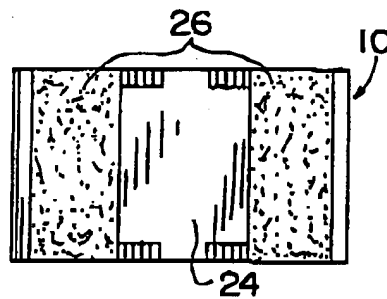


FIG. 4

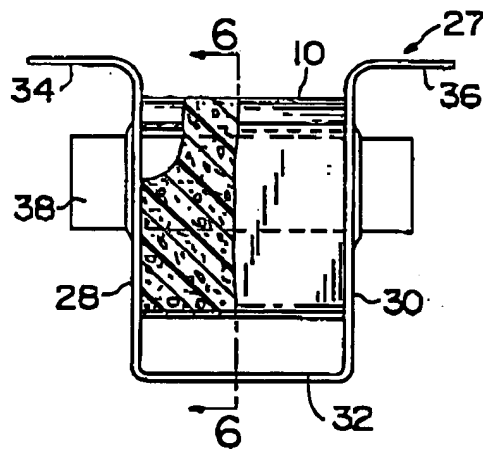


FIG. 5

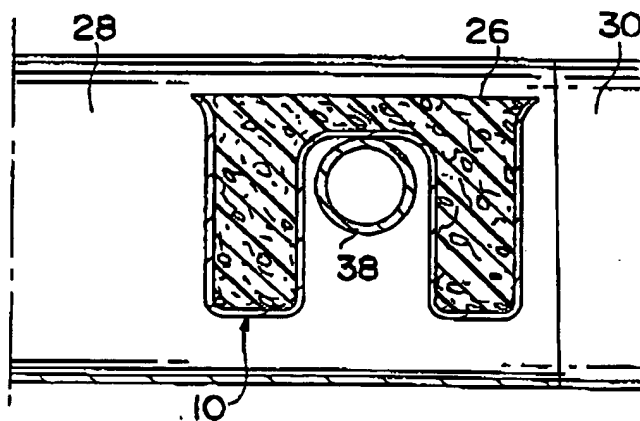


FIG. 6

SUBSTITUTE SHEET (RULE 26)

WO 00/13876

3/5

PCT/US98/17994

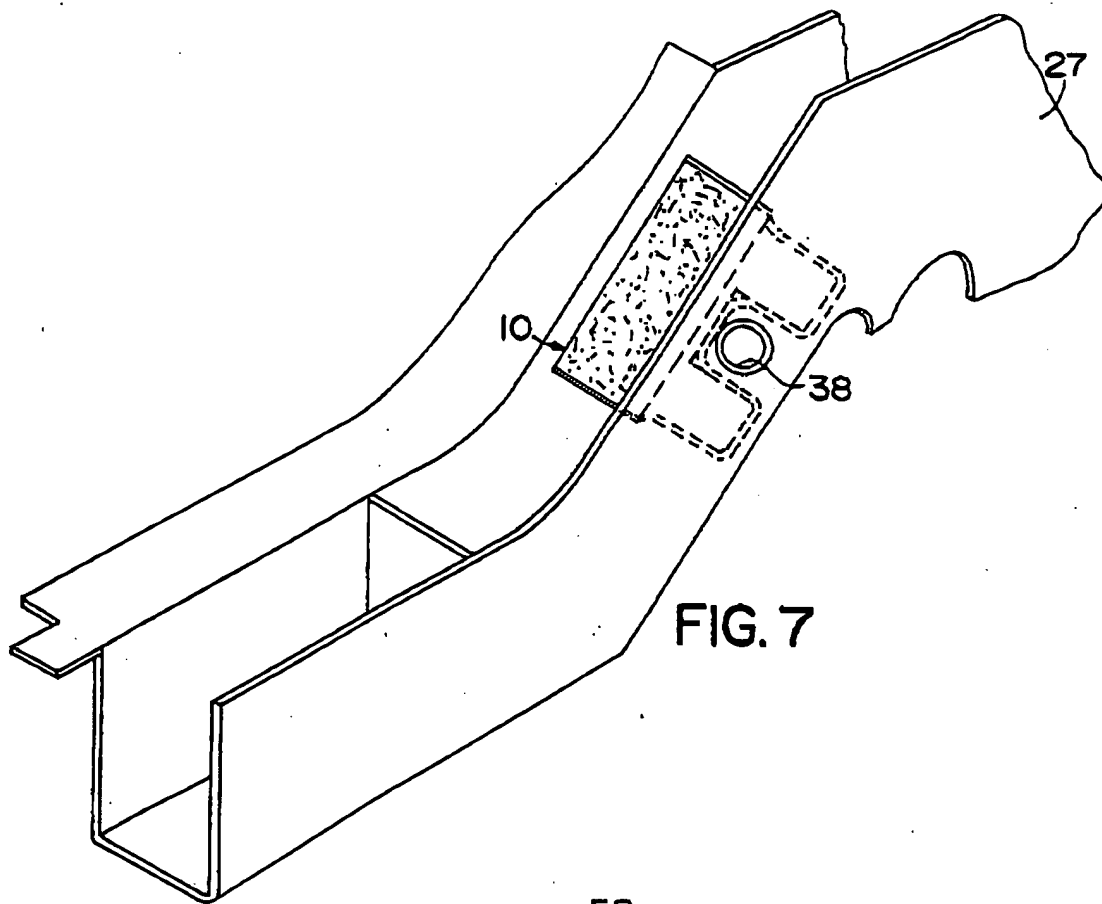


FIG. 7

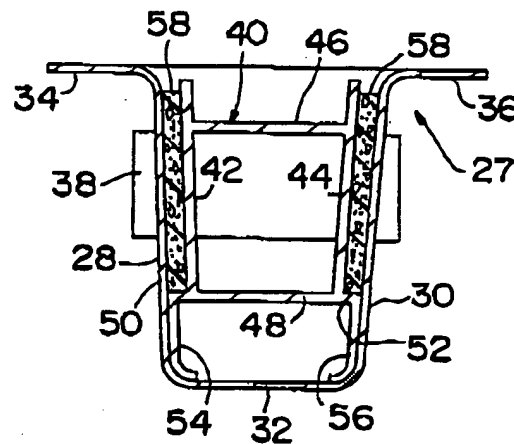




FIG. 8

SUBSTITUTE SHEET (RULE 26)

WO 00/13876

4/5

PCT/US98/17994

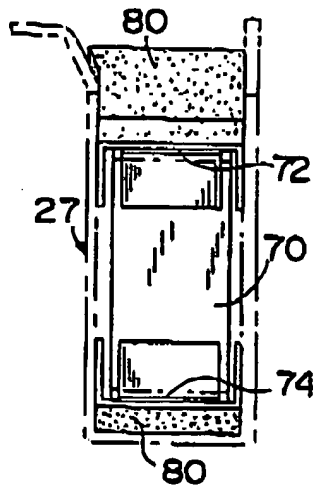
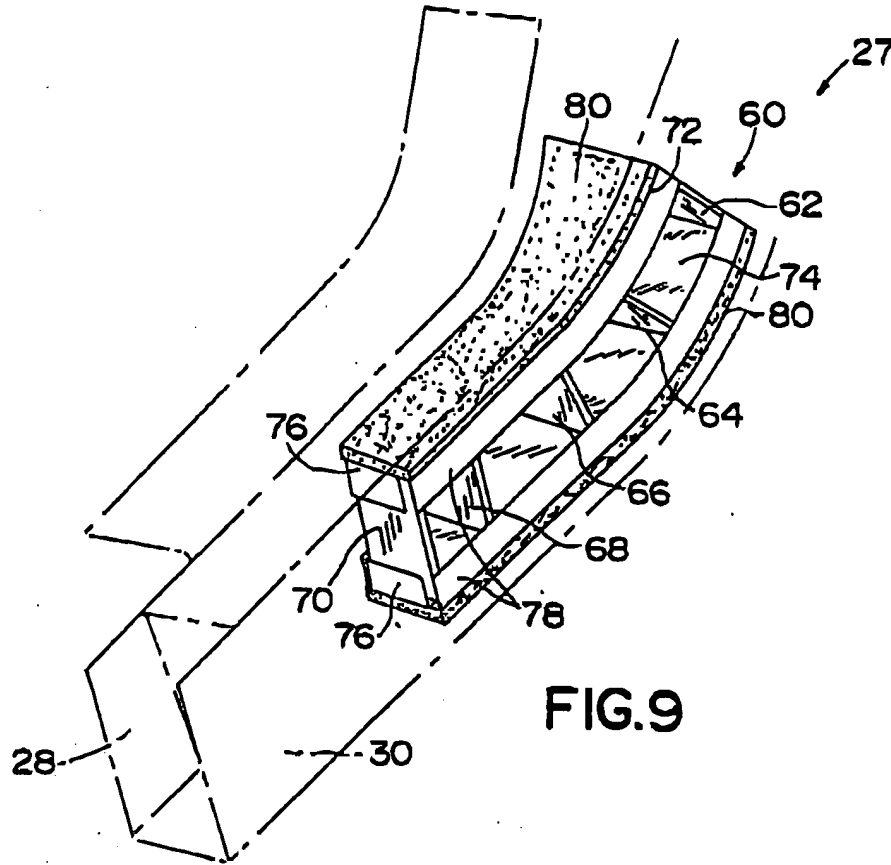


SUBSTITUTE SHEET (RULE 26)

WO 00/13876

5/5

PCT/US98/17994

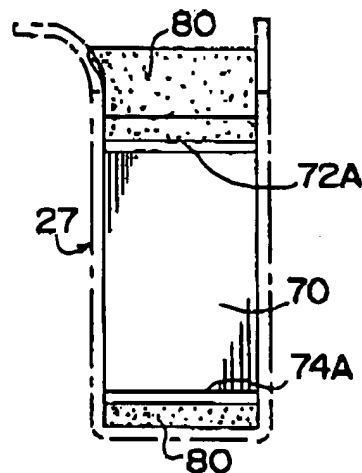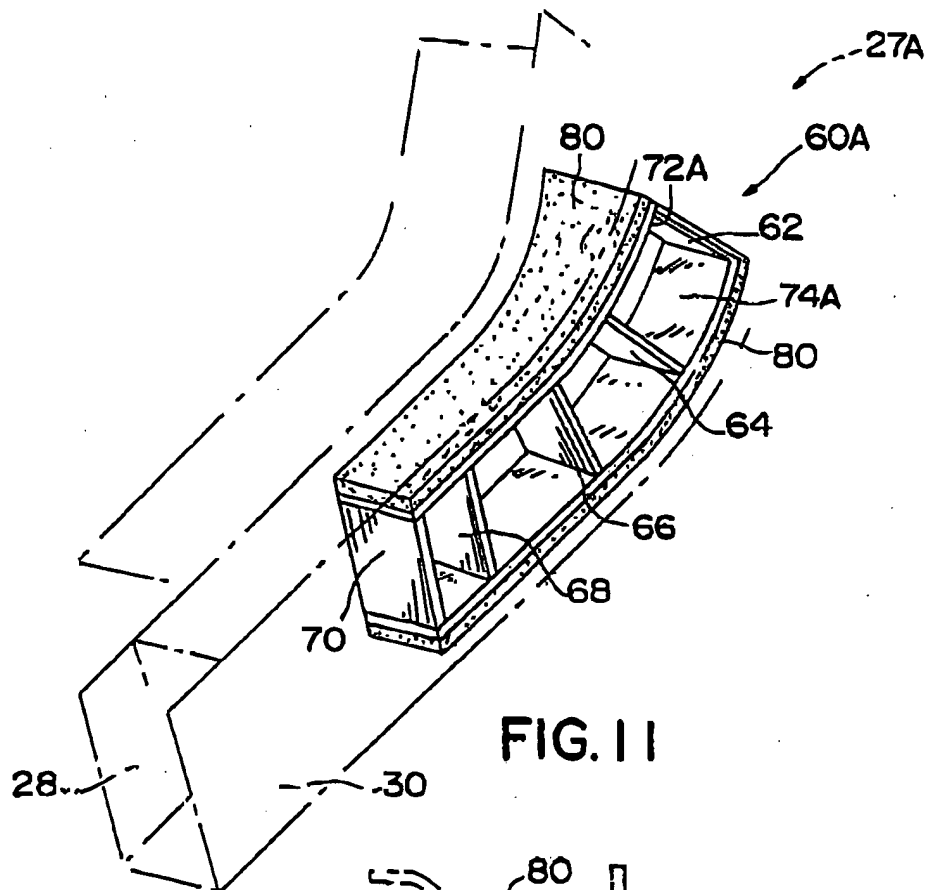

SUBSTITUTE SHEET (RULE 26)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US98/17994

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : B29C 47/00; B32B 1/00, 3/00, 33/00; C08J 9/22, 9/32.

US CL : Please See Extra Sheet.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : Please See Extra Sheet.

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3,905,478 A (PETERSON et al) 16 September 1975 (16-09-75), See figure 7; abstract.	1-9, 16, 19-22, 32-35
X	US 5,320,896 A (SMITH) 14 June 1994 (14-06-94), See Figure-6.	29, 30
Y	US 4,849,269 A (GRACE) 18 July 1989 (18-07-89), See Figure -1.	31, 32
A	US 5,755,486 A (WYCECH) 26 May 1998 (26-05-98).	1-35

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
B earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L documents which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*A* document member of the same patent family
O documents referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

15 DECEMBER 1998

Date of mailing of the international search report

14 JAN 1999

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

NASSER AHMAD

Telephone No. (703) 308-0661

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US98/17994

A. CLASSIFICATION OF SUBJECT MATTER:

US CL :

428/71, 119, 120, 122, 137; 52/793.1; 296/188, 205; 293/103, 109, 120; 156/196, 212, 242, 284, 306.9; 264/45.6, 46.6, 46.7, 267, 313.

B. FIELDS SEARCHED

Minimum documentation searched

Classification System: U.S.

428/71, 119, 120, 122, 137; 52/793.1; 296/188, 205; 293/103, 109, 120; 156/196, 212, 242, 284, 306.9; 264/45.6, 46.6, 46.7, 267, 313.